



BODY KIT SERIES for VW GOLF7 GTI >>>

FRONT LIP SPOILER with OPTIONAL FRONT SPLITTER (CARBON FIBER or FRP)



【iSWEEP Front Lip Spoiler/Splitter】

VW GOLF7 GTI

◇ Parts List

1. Front Spoiler × 1
2. M4 Self-Tapping Screws × 8 pcs.


◇ Optional Parts

1. Front Splitter (FRP) × 1
2. M4 Bolt, Nut, Washer × Two of each.

Thank you for your purchase for our iSWEEP Front Lip Spoiler. Please read our instruction manual thoroughly and CAREFULLY. To prevent any accidents or failures, the installation of this product should only be performed by persons with experience and proper knowledge of aftermarket body enhancements.

【Installation Instructions and Mounting Procedures】

This diagram shows the optional front splitter. If you did not purchase the front splitter disregard the splitter and install the four M4 tapping screws according to the diagram.

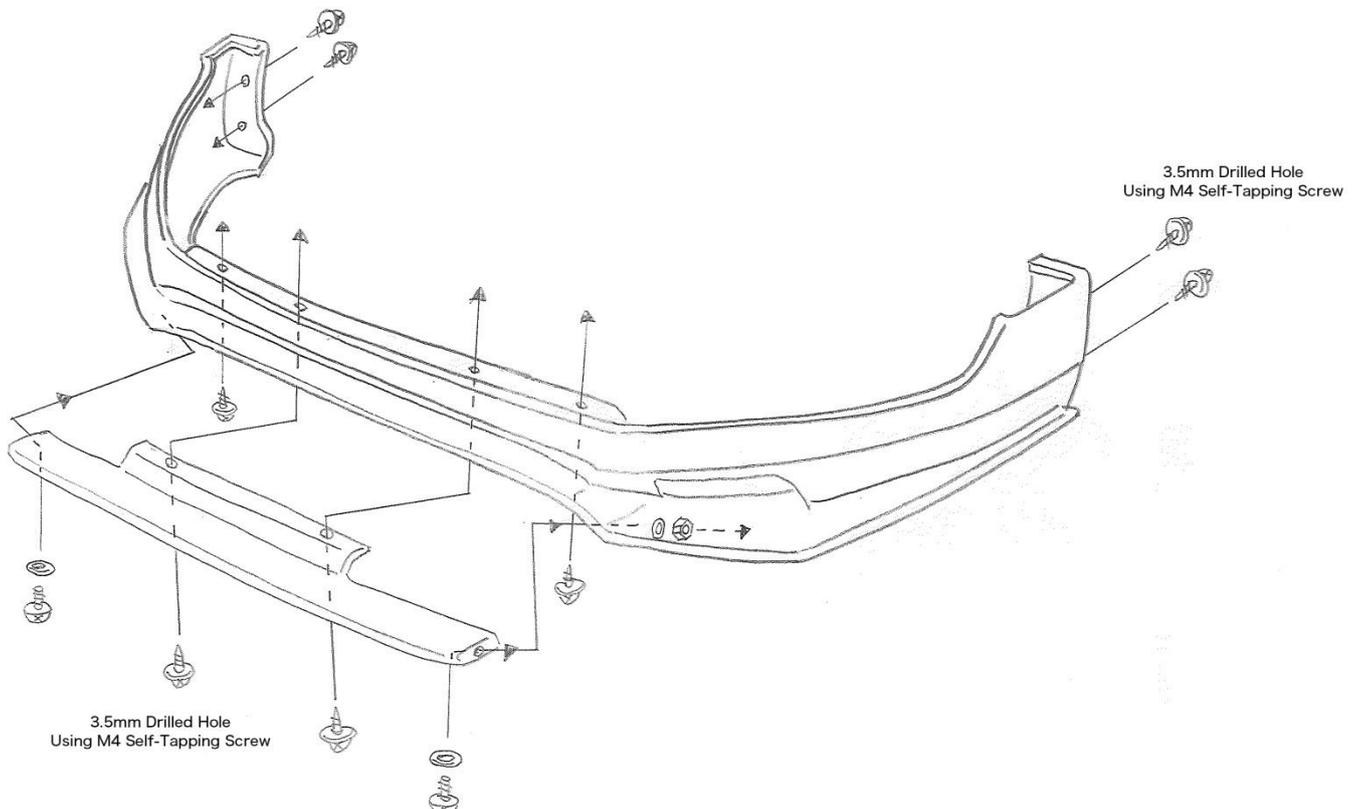


Turn page over

■ Installing the Front Lip Spoiler

1. Remove the original front spoiler. Then check the mounting position on both sides of the iSWEEP Front Lip Spoiler.
2. This product should be taken to a body shop or paint refinisher and be painted by a qualified automotive paint specialist.
3. Mark and drill four 3.5mm holes in the middle of the lip spoiler and two places at the fender arch as shown in the diagram.
4. Please use the supplied M4 tapping screws to secure the front lip spoiler where the holes were drilled.

※Please see below for the optional splitter mounting instructions.

【Installation Guide】

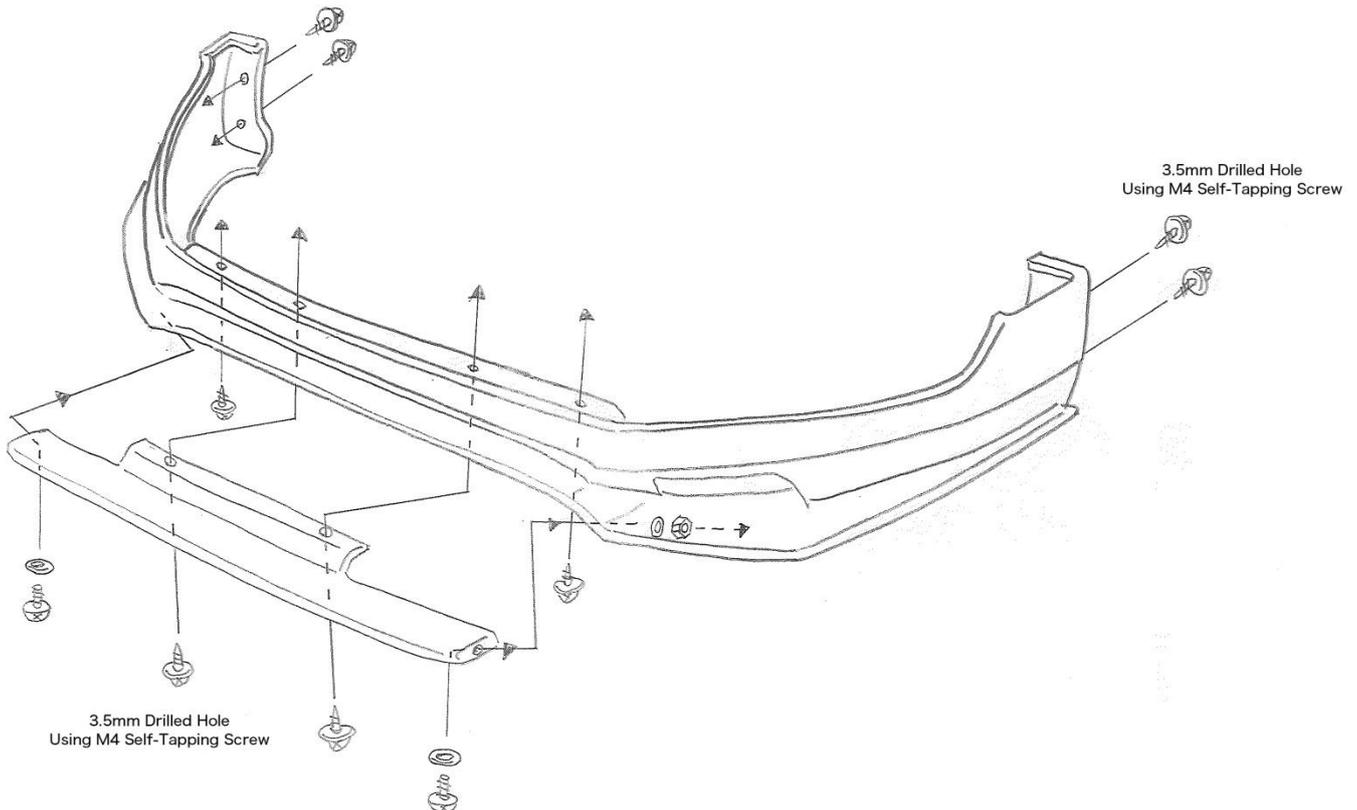

■ Front Lip Splitter (FRP)

1. Two of the four screws securing the front lip spoiler will be used to secure the front lip splitter. And also two additional holes will be needed to be drilled opened.
2. Make sure the outer two screws of the front lip spoiler are tight then loosen the inner two screws and align the splitter. Then mark where you will need to drill the two outer edge holes that will connect the splitter and the spoiler. Do one at a time to make sure it is straight.
3. Remove the splitter and drill two 4mm holes where the marks were made.
4. Reattach the front lip splitter and use the included bolt, washer, and nut to secure the front lip splitter to the front spoiler.